



**TELETRONICS**  
INTERNATIONAL INC.

**EZLOOP™**  
**USB VoIP Phone**

The EZLoop USB VoIP Phone is a plug and play IP phone with USB interface. Its streamline and fashion design, like a mobile phone, no drivers needed. The USB VoIP Phone provides standard H.323/SIP Internet telephony protocols which can be supported by different software providers. It is easy to operate and configure for Home and Office / SOHO users.




**Item 21-102**

## Features

- High Mobility
- Provided real-time volume adjustable button
- Phonebook for registering favorite numbers.
- History of Received calls, Called Numbers and Missed calls.
- Call Transfer and Redial options.

## Application Diagram

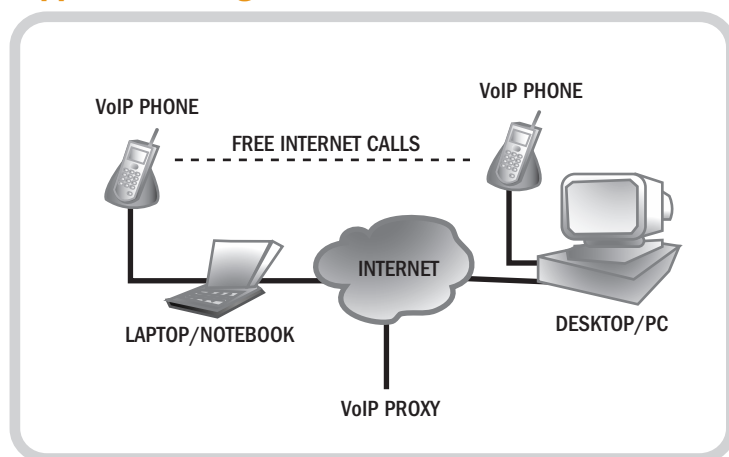

## Mechanical Specification

Physical Connectors	One USB N-Male connector
Cabling	USB A-type connector (6.56 ft/2 meters)
Standard support	Conform to USB 12 Mbps Spec. Version 1.1 Conform to USB Audio Device Release 1.0
Dimensions & Weight	2" (W) x 1" (H) x 5" (L) 0.5 Lbs (1.11 Kg)
Operating Voltage	4V ~ 5.25V
Operating Temperature	41 ~ 104°F (5 ~ 40 _)
Operating Humidity	20% ~ 80% RH

## Software Specification

Codec Supported	g729, g723.1, g711u, g711a
Proxy Supported	SIP Proxy, Out Bound Proxy, Stun Server
DTMF	RFC2833, Tone

## System Specification

Processor	Intel 486 DX 66 or above
Storage	32MB RAM, 10MB Hard Disk
Internet Service	Dial up, ISDN, Lease Line, xDSL, or LAN
Operating System	Microsoft Windows 98se/ME/2000XP